



WORLD'S TILE

All about Trust!



INDEX / *ÍNDICE*

06	CALACATTA
14	LONDON
20	FOREST
26	CALACATTA GOLD
34	CANYON
42	RUSTIC
50	UNIC TILES
52	LYON
56	CARRARA
62	TOKYO
66	PIETRA
74	OCEAN

THE CATALOGUE


EL CATÁLOGO

Type of product / *Tipología de producto*

Iconography / *Iconografía:*

-  PO porcelain / *porcelánico*
-  RE rectified / *rectificado*
-  WB white body / *pasta blanca*
-  matt / *mate*
-  silky matt / *mate sedoso*
-  polished / *pulido*
-  wall tile / *revestimiento*
-  floor tile / *pavimento*
-  frost resistance / *resistente a la helada*
-  anti-slip / *antideslizante*

Available sizes / *Formatos disponibles*



79x79 cm 31"x31"



Size / *Formato*

Type of product /
Tipología de producto

Description / *Descripción*



CARRARA silky matt / *mate sedoso* 80x80 cm 31"x31" (floor / suelo)
CANYON BASALT matt / *mate* 60x120 cm 24"x48" (wall / pared)

58

PORCELAIN / *PORCELÁNICO*

CARRARA

Formats / *Formatos*

80x80 cm 31"x31"



60x60 cm 24"x24"

Technical features / *Características técnicas*

Description	LENGTH AND WIDTH	THICKNESS	STRAIGHTNESS OF SIDES	RECTANGULARITY	SURFACE FLATNESS	WATER ABSORPTION	BREAKING STRENGTH (N)	MODULUS OF RUPTURE (N/mm ²)	RESISTANCE TO SURFACE ABRASION OF GLAZED TILES INTENDED FOR USE ON FLOORS	RESISTANCE TO THERMAL SHOCK	CRAZING RESISTANCE	FROST RESISTANCE	CHEMICAL RESISTANCE	RESISTANCE TO STAINING
REQUIRED STANDARDS (ISO 10545)	± 0.3 %	± 5 %	± 0.3 %	± 0.3 %	± 0.4 %	E ≤ 0.5 %	1300 $\sqrt{5}$	35kN	REPORT ABRASION CLASS AND FRICTION COEFFICIENT	NO CRAZING OBSERVED	NO CRAZING OBSERVED	REQUIRED	GB5	CLASS 3+
RESULTS	± 0.3 %	± 5 %	± 0.3 %	± 0.3 %	± 0.4 %	E ≤ 0.5 %	2400 $\sqrt{5}$	45kN	CLASS 1 STILES 10	RESISTANT	RESISTANT	RESISTANT	GA	CLASS 4+



Description	LENGTH AND WIDTH	THICKNESS	STRAIGHTNESS OF SIDES	RECTANGULARITY	SURFACE FLATNESS	WATER ABSORPTION	BREAKING STRENGTH (N)	MODULUS OF RUPTURE (N/mm ²)	RESISTANCE TO SURFACE ABRASION OF GLAZED TILES INTENDED FOR USE ON FLOORS	RESISTANCE TO THERMAL SHOCK	CRAZING RESISTANCE	FROST RESISTANCE	CHEMICAL RESISTANCE	RESISTANCE TO STAINING
REQUIRED STANDARDS (ISO 10545)	± 0.3 %	± 5 %	± 0.3 %	± 0.3 %	± 0.4 %	E ≤ 0.5 %	1300 $\sqrt{5}$	35kN	REPORT ABRASION CLASS AND FRICTION COEFFICIENT	NO CRAZING OBSERVED	NO CRAZING OBSERVED	REQUIRED	GB5	CLASS 3+
RESULTS	± 0.3 %	± 5 %	± 0.3 %	± 0.3 %	± 0.4 %	E ≤ 0.5 %	2400 $\sqrt{5}$	45kN	CLASS 1 STILES 10	RESISTANT	RESISTANT	RESISTANT	GB	CLASS 4+

Packing / *Embalaje*

FORMAT FORMATO	PCS/BOX REZAS/CAJA	M2/BOX M2/CAJA	M2/PALLET M2/PALE	BOXES/PALLET CAJAS/PALE	WEIGHT/PALLET PESOPALE	PALLET (cm) PALE (cm)
80x80 cm - 31"x31"	2	1.28	51.44	68	1296	80x120x95
60x60 cm - 24"x24"	4	1.44	46.08	32	960	80x120x75



CALACATTA

"Every block of stone has a statue inside it
and it is the task of the sculptor to discover it"

by Michelangelo Buonarroti


*"Cada bloque de piedra tiene una estatua en su interior
y es la tarea del escultor de descubrirla"*



PORCELAIN / PORCELÁNICO



Colours / *Colores*

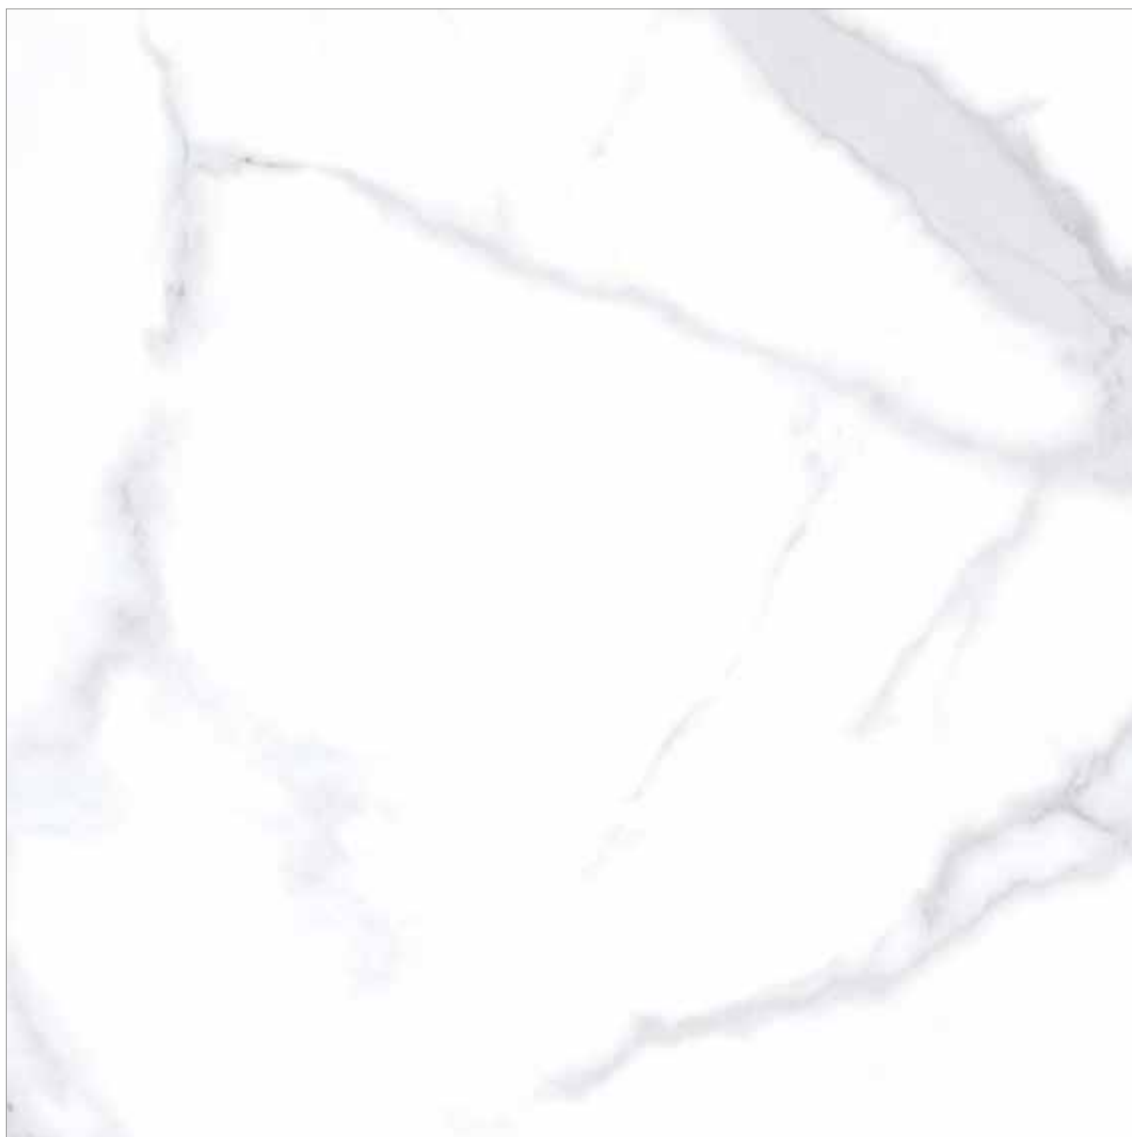

CALACATTA






CALACATTA *silky matt / mate sedoso* 30x60 cm 12"x24" (wall / pared)
CALACATTA *polished / pulido* 60x120 cm 24"x48" (floor / suelo)



CALACATTA


Faces | *Caras*

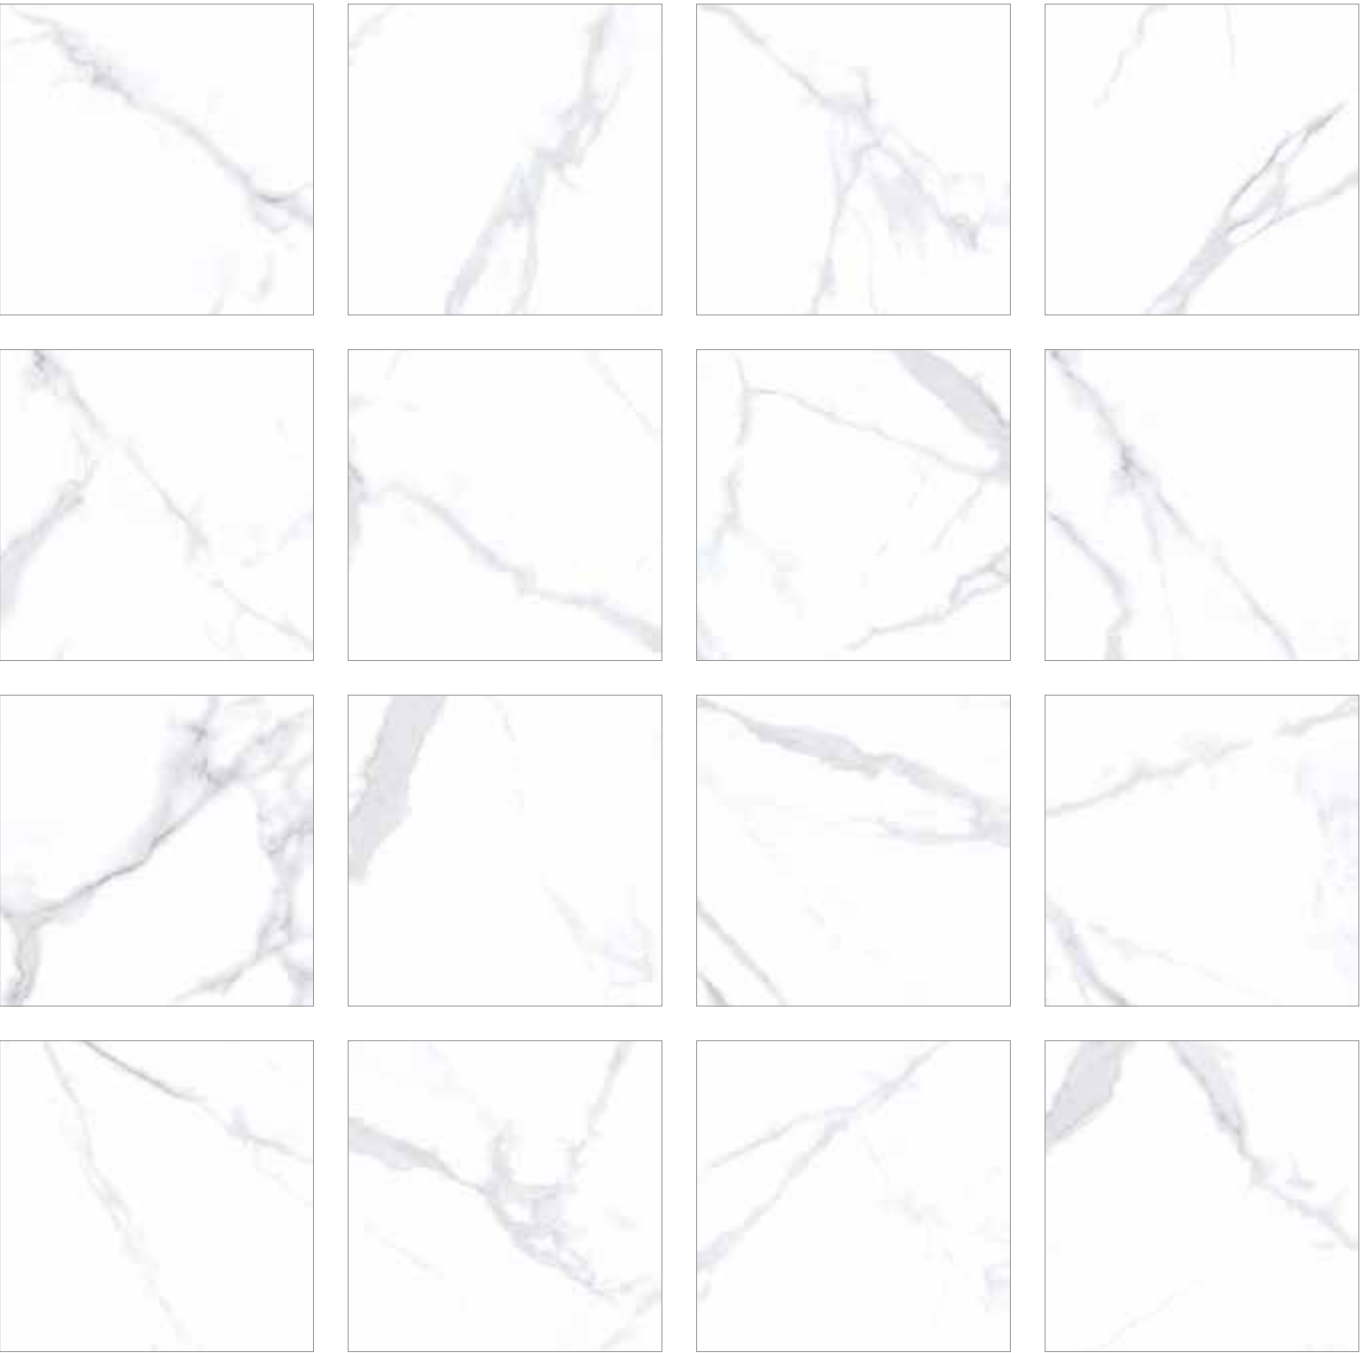

60x60 cm 24"x24"

16 different faces | *16 caras diferentes*



Formats / *Formatos***60x120** cm 24"x48"**60x60** cm 24"x24"**30x60** cm 12"x24"Disponible en 80x80 / *Available in 80x80*Technical features / *Características técnicas*

description	LENGTH AND WIDTH	THICKNESS	STRAIGHTNESS OF SIDES	RECTANGULARITY	SURFACE FLATNESS	WATER ABSORPTION	BREAKING STRENGTH (N)	MODULUS OF RUPTURE (N/mm ²)	RESISTANCE TO SURFACE ABRASION OF GLAZED TILES INTENDED FOR USE ON FLOORS	RESISTANCE TO THERMAL SHOCK	CRAZING RESISTANCE	FROST RESISTANCE	CHEMICAL RESISTANCE	RESISTANCE TO STAINING
REQUIRED STANDARDS (ISO 13006)	± 0.3 %	± 5 %	± 0.3 %	± 0.3 %	± 0.4 %	E ≤ 0.5 %	1300 $\sqrt{5}$	35sR	REPORT ABRASION CLASS AND CYCLES PASSED	NO CRAZING OBSERVED	NO CRAZING OBSERVED	REQUIRED	GBs	CLASS 3 ≤
RESULTS	<± 0.3 %	<± 5 %	<± 0.3 %	<± 0.3 %	<± 0.4 %	E ≤ 0.5 %	2400 $\sqrt{5}$	45sR	CLASS 1 CYCLES 600	RESISTANT	RESISTANT	RESISTANT	GA	CLASS 4 ≤



description	LENGTH AND WIDTH	THICKNESS	STRAIGHTNESS OF SIDES	RECTANGULARITY	SURFACE FLATNESS	WATER ABSORPTION	BREAKING STRENGTH (N)	MODULUS OF RUPTURE (N/mm ²)	RESISTANCE TO SURFACE ABRASION OF GLAZED TILES INTENDED FOR USE ON FLOORS	RESISTANCE TO THERMAL SHOCK	CRAZING RESISTANCE	FROST RESISTANCE	CHEMICAL RESISTANCE	RESISTANCE TO STAINING
REQUIRED STANDARDS (ISO 13006)	± 0.3 %	± 5 %	± 0.3 %	± 0.3 %	± 0.4 %	E ≤ 0.5 %	1300 $\sqrt{5}$	35sR	REPORT ABRASION CLASS AND CYCLES PASSED	NO CRAZING OBSERVED	NO CRAZING OBSERVED	REQUIRED	GBs	CLASS 3 ≤
RESULTS	<± 0.3 %	<± 5 %	<± 0.3 %	<± 0.3 %	<± 0.4 %	E ≤ 0.5 %	2400 $\sqrt{5}$	45sR	CLASS 1 CYCLES 150	RESISTANT	RESISTANT	RESISTANT	GBs	CLASS 4 ≤

Packing / *Embalaje*

FORMAT FORMATO	PCS/BOX PIEZAS/CAJA	M2/BOX M2/CAJA	M2/PALLET M2/PALÉ	BOXES/PALLET CAJAS/PALÉ	WEIGHT/PALLET PESO/PALÉ	PALLET (cm) PALÉ (cm)
60x120 cm · 24"x48"	2	1,44	46,08	32	960	85x125x75
60x60 cm · 24"x24"	4	1,44	46,08	32	960	80x120x75
30x60 cm · 12"x24"	5	0,9	43,2	48	902	80x120x75





CALACATTA *silky matt* / *mate sedoso* 30x60 cm 12"x24" (wall / pared)
CALACATTA *polished* / *pulido* 60x120 cm 24"x48" (floor / suelo)
LONDON GRAFITE *matt* / *mate* 60x60 cm 24"x24" (central island / isla central)





LONDON

“The intellectual, the moral, the religious seem to me all naturally bound up and interlinked together in one great and harmonious whole”

by Ada Lovelace

“Lo intelectual, lo moral y lo religioso parecen estar interrelacionados en un todo armonioso”

PORCELAIN / PORCELÁNICO



Colours / *Colores*



LONDON SILVER



LONDON GRAY



LONDON CREAM



LONDON GRAFITE



LONDON TAUPE








LONDON TAUPE *matt / mate* 60x60 cm 24"x24"

LONDON




LONDON SILVER *matt / mate* 60x120 cm 24"x48" (wall / pared)
LONDON GRAY *matt / mate* 60x60 cm 24"x24" (indoor / interior)
LONDON GRAY *anti-slip / antideslizante* 60x60 cm 24"x24" (outdoor / exterior)

Formats / *Formatos*



60x120 cm 24"x48"



60x60 cm 24"x24"



30x60 cm 12"x24"



Disponible en 80x80 / *Available in 80x80*





Technical features / Características técnicas



description	LENGTH AND WIDTH	THICKNESS	STRAIGHTNESS OF SIDES	RECTANGULARITY	SURFACE FLATNESS	WATER ABSORPTION	BREAKING STRENGTH (N)	MODULUS OF RUPTURE (N/mm ²)	RESISTANCE TO SURFACE ABRASION OF GLAZED TILES INTENDED FOR USE ON FLOORS	RESISTANCE TO THERMAL SHOCK	CRAZING RESISTANCE	FROST RESISTANCE	CHEMICAL RESISTANCE	RESISTANCE TO STAINING
REQUIRED STANDARDS (ISO 13006)	± 0.3 %	± 5 %	± 0.3 %	± 0.3 %	± 0.4 %	E ≤ 0.5 %	1300 $\leq$ 5	35sR	REPORT ABRASION CLASS AND CYCLES PASSED	NO CRAZING OBSERVED	NO CRAZING OBSERVED	REQUIRED	GBs	CLASS 3 s
RESULTS	≤± 0.3 %	≤± 5 %	≤± 0.3 %	≤± 0.3 %	≤± 0.4 %	E ≤ 0.5 %	2300 $\leq$ 5	43sR	CLASS 3 CYCLES 750	RESISTANT	RESISTANT	RESISTANT	GA	CLASS 4 s



description	LENGTH AND WIDTH	THICKNESS	STRAIGHTNESS OF SIDES	RECTANGULARITY	SURFACE FLATNESS	WATER ABSORPTION	BREAKING STRENGTH (N)	MODULUS OF RUPTURE (N/mm ²)	RESISTANCE TO SURFACE ABRASION OF GLAZED TILES INTENDED FOR USE ON FLOORS	RESISTANCE TO THERMAL SHOCK	CRAZING RESISTANCE	FROST RESISTANCE	CHEMICAL RESISTANCE	RESISTANCE TO STAINING	slip-resistance (test method PENDULUM BS 7963)
REQUIRED STANDARDS (ISO 13006)	± 0.3 %	± 5 %	± 0.3 %	± 0.3 %	± 0.4 %	E ≤ 0.5 %	1300 $\leq$ 5	35sR	REPORT ABRASION CLASS AND CYCLES PASSED	NO CRAZING OBSERVED	NO CRAZING OBSERVED	REQUIRED	GBs	CLASS 3 s	-
RESULTS	≤± 0.3 %	≤± 5 %	≤± 0.3 %	≤± 0.3 %	≤± 0.4 %	E ≤ 0.5 %	2300 $\leq$ 5	43sR	CLASS 3 CYCLES 1500	RESISTANT	RESISTANT	RESISTANT	GA	CLASS 4 s	Low slip potential (36+)

Packing / Embalaje

FORMAT FORMATO	PCS/BOX PIEZAS/CAJA	M2/BOX M2/CAJA	M2/PALLET M2/PALÉ	BOXES/PALLET CAJAS/PALÉ	WEIGHT/PALLET PESO/PALÉ	PALLET (cm) PALÉ (cm)
60x120 cm · 24"x48"	2	1,44	46,08	32	960	85x125x75
60x60 cm · 24"x24"	4	1,44	46,08	32	960	80x120x75
30x60 cm · 12"x24"	5	0,9	43,2	48	902	80x120x75





FOREST

"The trees, the flowers, the plants grow in silence.
The stars, the sun, the moon move in silence.
Silence gives us a new perspective"

by Mother Teresa

*"Los árboles, las flores, las plantas crecen en silencio.
Las estrellas, el sol, la luna se mueven en silencio.
El silencio nos da una nueva perspectiva"*



Colours / *Colores*



FOREST PINE



FOREST MAPLE



FOREST OAK



FOREST GREY



FOREST

Faces | *Caras*



FOREST MAPLE

24 different faces in all colours | *24 caras diferentes en todos los colores*





Formats / *Formatos*

20x120 cm 8"x48"

Technical features / *Características técnicas*

description	LENGTH AND WIDTH	THICKNESS	STRAIGHTNESS OF SIDES	RECTANGULARITY	SURFACE FLATNESS	WATER ABSORPTION	BREAKING STRENGTH (N)	MODULUS OF RUPTURE (N/mm²)	RESISTANCE TO SURFACE ABRASION OF GLAZED TILES INTENDED FOR USE ON FLOORS	RESISTANCE TO THERMAL SHOCK	CRAZING RESISTANCE	FROST RESISTANCE	CHEMICAL RESISTANCE	RESISTANCE TO STAINING
REQUIRED STANDARDS (ISO 13006)	± 0.3 %	± 5 %	± 0.3 %	± 0.3 %	± 0.4 %	E ≤ 0.5 %	1300 μ S	35sR	REPORT ABRASION CLASS AND CYCLES PASSED	NO CRAZING OBSERVED	NO CRAZING OBSERVED	REQUIRED	GBs	CLASS 3 s
RESULTS	<± 0.3 %	<± 5 %	<± 0.3 %	<± 0.3 %	<± 0.4 %	E ≤ 0.5 %	2300 μ S	43sR	CLASS 3 CYCLES 750	RESISTANT	RESISTANT	RESISTANT	GA	CLASS 4 s

Packing / *Embalaje*

FORMAT FORMATO	PCS/BOX PIEZAS/CAJA	M2/BOX M2/CAJA	M2/PALLET M2/PALÉ	BOXES/PALLET CAJAS/PALÉ	WEIGHT/PALLET PESO/PALÉ	PALLET (cm) PALÉ (cm)
20x120 cm · 8"x48"	4	0,96	61,44	64	1280	80x120x95







FOREST MAPLE *matt / mate* 20x120 cm 8"x48"

CALACATTA GOLD

“There are painters who transform the sun to a yellow spot, but there are others who with the help of their art and their intelligence, transform a yellow spot into sun”


by Pablo Picasso

“Hay pintores que transforman el sol en una mancha amarilla, pero hay otros que con la ayuda de su arte y su inteligencia, transforman una mancha amarilla en sol”

PORCELAIN / PORCELÁNICO



Colours / *Colores*

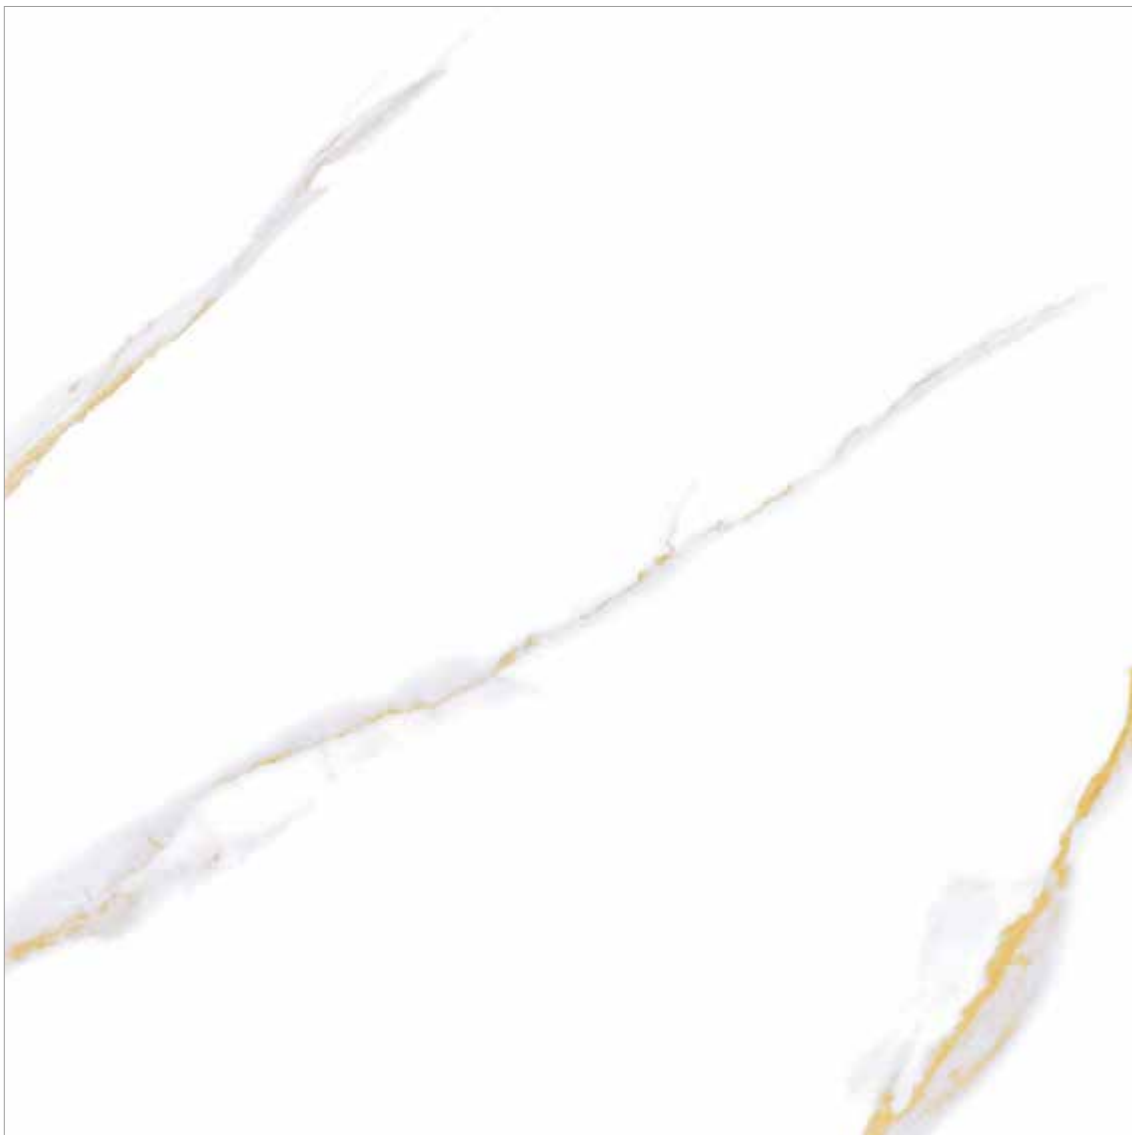

CALACATTA GOLD






CALACATTA GOLD *polished / pulido* 60x120 cm 24"x48"
FOREST PINE *matt / mate* 20x120 cm 8"x48" (floor / suelo)



CALACATTA GOLD

Faces | *Caras*

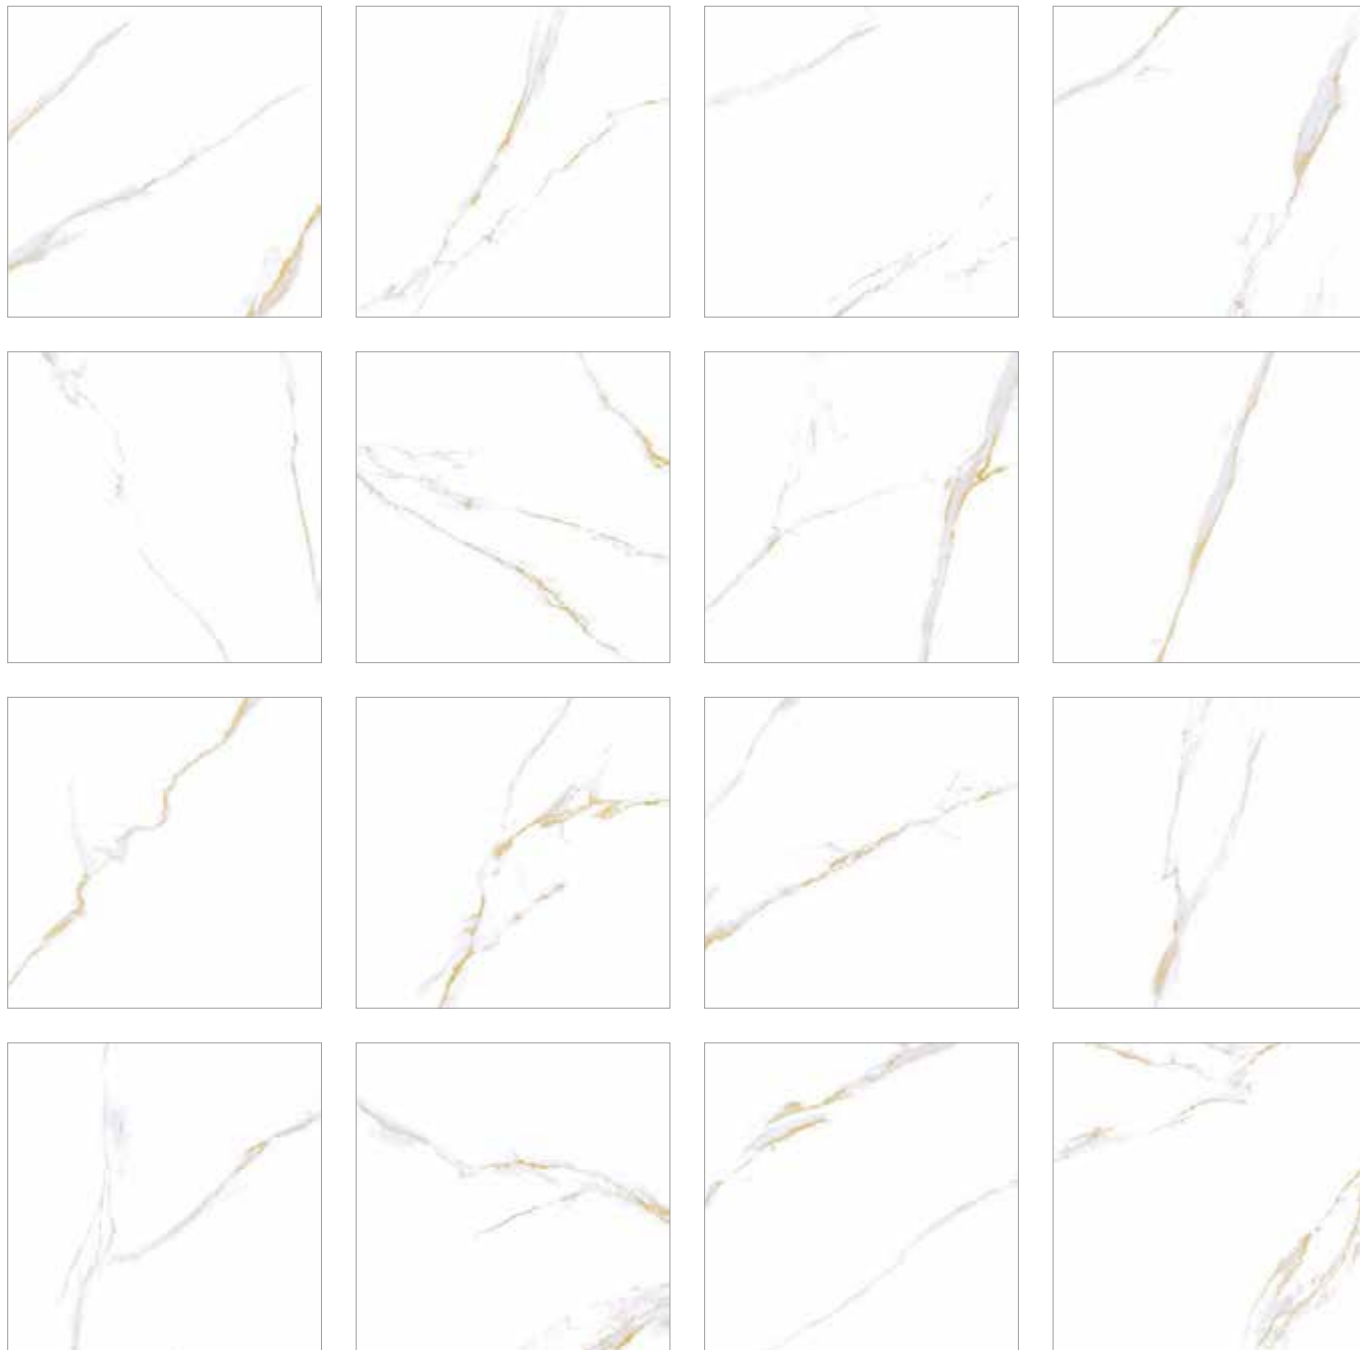


60x60 cm 24"x24"

16 different faces | *16 caras diferentes*






Formats / Formatos




60x120 cm 24"x48"



30x60 cm 12"x24"



60x60 cm 24"x24"



80x80 cm 31"x31"



Disponible en 80x80 / Available in 80x80

Technical features / Características técnicas



description	LENGTH AND WIDTH	THICKNESS	STRAIGHTNESS OF SIDES	RECTANGULARITY	SURFACE FLATNESS	WATER ABSORPTION	BREAKING STRENGTH (N)	MODULUS OF RUPTURE (N/mm ²)	RESISTANCE TO SURFACE ABRASION OF GLAZED TILES INTENDED FOR USE ON FLOORS	RESISTANCE TO THERMAL SHOCK	CRAZING RESISTANCE	FROST RESISTANCE	CHEMICAL RESISTANCE	RESISTANCE TO STAINING
REQUIRED STANDARDS (ISO 13006)	± 0.3 %	± 5 %	± 0.3 %	± 0.3 %	± 0.4 %	E ≤ 0.5 %	1300 $\sqrt{S}$	35sR	REPORT ABRASION CLASS AND CYCLES PASSED	NO CRAZING OBSERVED	NO CRAZING OBSERVED	REQUIRED	GBs	CLASS 3 ≤
RESULTS	<± 0.3 %	<± 5 %	<± 0.3 %	<± 0.3 %	<± 0.4 %	E ≤ 0.5 %	2400 $\sqrt{S}$	45sR	CLASS 2 CYCLES 600	RESISTANT	RESISTANT	RESISTANT	GA	CLASS 4 ≤



description	LENGTH AND WIDTH	THICKNESS	STRAIGHTNESS OF SIDES	RECTANGULARITY	SURFACE FLATNESS	WATER ABSORPTION	BREAKING STRENGTH (N)	MODULUS OF RUPTURE (N/mm ²)	RESISTANCE TO SURFACE ABRASION OF GLAZED TILES INTENDED FOR USE ON FLOORS	RESISTANCE TO THERMAL SHOCK	CRAZING RESISTANCE	FROST RESISTANCE	CHEMICAL RESISTANCE	RESISTANCE TO STAINING
REQUIRED STANDARDS (ISO 13006)	± 0.3 %	± 5 %	± 0.3 %	± 0.3 %	± 0.4 %	E ≤ 0.5 %	1300 $\sqrt{S}$	35sR	REPORT ABRASION CLASS AND CYCLES PASSED	NO CRAZING OBSERVED	NO CRAZING OBSERVED	REQUIRED	GBs	CLASS 3 ≤
RESULTS	<± 0.3 %	<± 5 %	<± 0.3 %	<± 0.3 %	<± 0.4 %	E ≤ 0.5 %	2400 $\sqrt{S}$	45sR	CLASS 1 CYCLES 150	RESISTANT	RESISTANT	RESISTANT	GBs	CLASS 4 ≤

Packing / Embalaje

FORMAT FORMATO	PCS/BOX PIEZAS/CAJA	M2/BOX M2/CAJA	M2/PALLET M2/PALÉ	BOXES/PALLET CAJAS/PALÉ	WEIGHT/PALLET PESO/PALÉ	PALLET (cm) PALÉ (cm)
60x120 cm · 24"x48"	2	1,44	46,08	32	960	85x125x75
60x60 cm · 24"x24"	4	1,44	46,08	32	960	80x120x75
30x60 cm · 12"x24"	5	0,9	43,2	48	902	80x120x75
80x80 cm · 31"x31"	2	1,28	61,44	48	1296	80x120x95




CALACATTA GOLD



CALACATTA GOLD *silky matt / mate sedoso* 60x120 cm 24"x48"





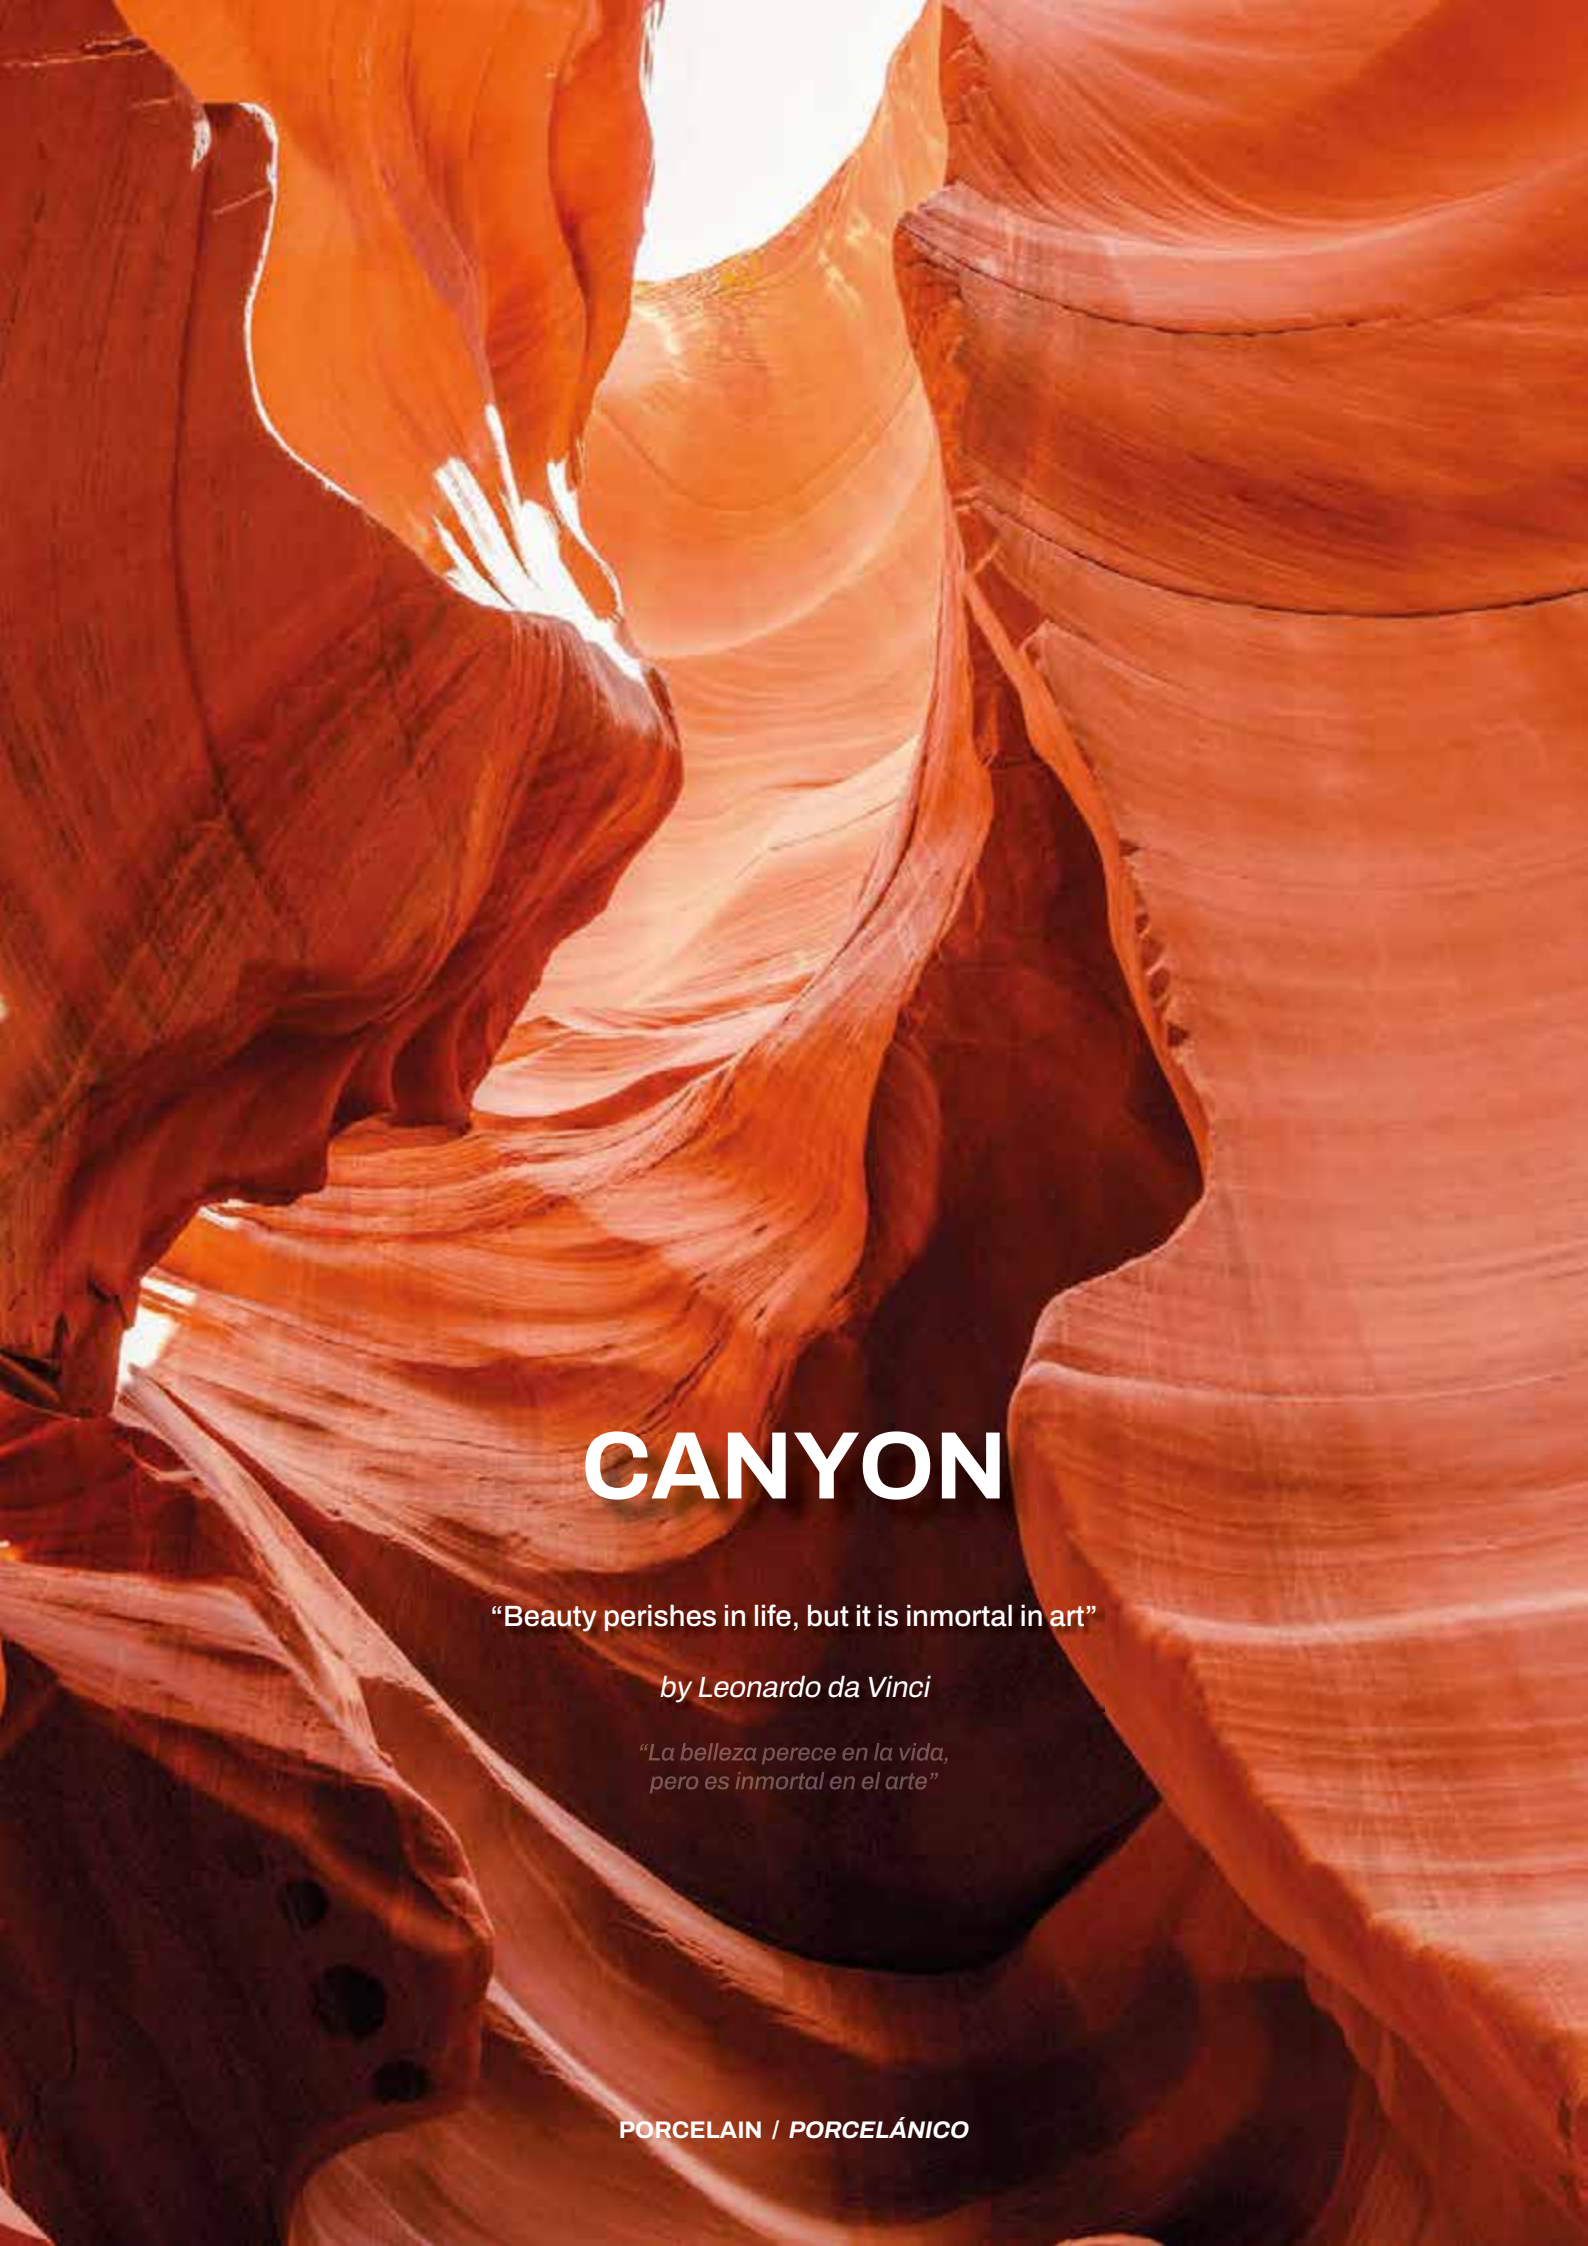

CANYON

“Beauty perishes in life, but it is immortal in art”

by Leonardo da Vinci

*“La belleza perece en la vida,
pero es inmortal en el arte”*

PORCELAIN / PORCELÁNICO



Colours / *Colores*



CANYON SAND



CANYON TUFF



CANYON CHERT



CANYON BASALT



CANYON BASALT *matt / mate* 60x120 cm 24"x48" (wall / pared)
CANYON CHERT *matt / mate* 60x120 cm 24"x48" (fireplace / chimenea)
FOREST GREY *matt / mate* 20x120 cm 8"x48" (floor / suelo)





CANYON

Faces | *Caras*



CANYON BASALT


8 different faces | *8 caras diferentes*






Disponible en 20 mm. / Available in 20 mm.

Formats / Formatos



60x120 cm 24"x48"



60x60 cm 24"x24"



30x60 cm 12"x24"



Disponible en 80x80 / Available in 80x80

Technical features / Características técnicas



description	LENGTH AND WIDTH	THICKNESS	STRAIGHTNESS OF SIDES	RECTANGULARITY	SURFACE FLATNESS	WATER ABSORPTION	BREAKING STRENGTH (N)	MODULUS OF RUPTURE (N/mm ²)	RESISTANCE TO SURFACE ABRASION OF GLAZED TILES INTENDED FOR USE ON FLOORS	RESISTANCE TO THERMAL SHOCK	CRAZING RESISTANCE	FROST RESISTANCE	CHEMICAL RESISTANCE	RESISTANCE TO STAINING
REQUIRED STANDARDS (ISO 13006)	± 0.3 %	± 5 %	± 0.3 %	± 0.3 %	± 0.4 %	E ≤ 0.5 %	1300 $\sqrt{5}$	35sR	REPORT ABRASION CLASS AND CYCLES PASSED	NO CRAZING OBSERVED	NO CRAZING OBSERVED	REQUIRED	GBs	CLASS 3 s
RESULTS	<± 0.3 %	<± 5 %	<± 0.3 %	<± 0.3 %	<± 0.4 %	E ≤ 0.5 %	2300 $\sqrt{5}$	43sR	CLASS 3 CYCLES 750	RESISTANT	RESISTANT	RESISTANT	GA	CLASS 4 s

Packing / Embalaje

FORMAT FORMATO	PCS/BOX PIEZAS/CAJA	M2/BOX M2/CAJA	M2/PALLET M2/PALÉ	BOXES/PALLET CAJAS/PALÉ	WEIGHT/PALLET PESO/PALÉ	PALLET (cm) PALÉ (cm)
60x120 cm · 24"x48"	2	1,44	46,08	32	960	85x125x75
60x60 cm · 24"x24"	4	1,44	46,08	32	960	80x120x75
30x60 cm · 12"x24"	5	0,9	43,2	48	902	80x120x75





CANYON TUFF *matt / mate* 60x120 cm 24"x48" (wall / floor)
CANYON SAND *matt / mate* 60x120 cm 24"x48" (fireplace / chimenea)
FOREST MAPLE *matt / mate* 20x120 cm 8"x48" (floor / suelo)





A rustic log cabin at night, illuminated by warm interior lights and a string of warm white lights along the eaves. A large fire burns brightly in a stone fire pit in the foreground, with logs and branches visible. The cabin has a dark roof and a small window on the left. The background is dark with some foliage visible.

RUSTIC

“The roots below the earth claim no rewards for making
the branches fruitful”

by Rabindranath Tagore

“Las raíces bajo la tierra no piden recompensa por hacer
que las ramas den frutos”

PORCELAIN / PORCELÁNICO



Colours / *Colores*



RUSTIC TEKA



RUSTIC WALNUT







RUSTIC WALNUT *matt / mate* 20x120 cm 8"x48"

RUSTIC

Faces | *Caras*



RUSTIC WALNUT

24 different faces in all colours | *24 caras diferentes en todos los colores*





Formats / *Formatos*



20x120 cm 8"x48"

Technical features / *Características técnicas*



description	LENGTH AND WIDTH	THICKNESS	STRAIGHTNESS OF SIDES	RECTANGULARITY	SURFACE FLATNESS	WATER ABSORPTION	BREAKING STRENGTH (N)	MODULUS OF RUPTURE (N/mm ²)	RESISTANCE TO SURFACE ABRASION OF GLAZED TILES INTENDED FOR USE ON FLOORS	RESISTANCE TO THERMAL SHOCK	CRAZING RESISTANCE	FROST RESISTANCE	CHEMICAL RESISTANCE	RESISTANCE TO STAINING
REQUIRED STANDARDS (ISO 13006)	± 0.3 %	± 5 %	± 0.3 %	± 0.3 %	± 0.4 %	E ≤ 0.5 %	1300 μ S	35sR	REPORT ABRASION CLASS AND CYCLES PASSED	NO CRAZING OBSERVED	NO CRAZING OBSERVED	REQUIRED	GBs	CLASS 3 s
RESULTS	<± 0.3 %	<± 5 %	<± 0.3 %	<± 0.3 %	<± 0.4 %	E ≤ 0.5 %	2300 μ S	43sR	CLASS 3 CYCLES 750	RESISTANT	RESISTANT	RESISTANT	GA	CLASS 4 s

Packing / *Embalaje*

FORMAT FORMATO	PCS/BOX PIEZAS/CAJA	M2/BOX M2/CAJA	M2/PALLET M2/PALÉ	BOXES/PALLET CAJAS/PALÉ	WEIGHT/PALLET PESO/PALÉ	PALLET (cm) PALÉ (cm)
20x120 cm · 8"x48"	4	0,96	61,44	64	1280	80x120x95



RUSTIC



RUSTIC TEKA *matt / mate* 60x120 cm 8"x48"









UNIC TILES

“There is no exquisite beauty without some
strangeness in the proportion”

by Edgar Allan Poe

*“No hay una belleza exquisita sin cierta
extrañeza en la proporción”*



LYON

“Art is a way of recognizing oneself”

by Louise Bourgeois

“El arte es garantía de cordura”

PORCELAIN / PORCELÁNICO



Colours / *Colores*



LYON CREAM



LYON BROWN



LYON SILVER



LYON GRAFITO




Faces | *Caras*



LYON BROWN

8 different faces in all colours | *8 caras diferentes en todos los colores*



Formats / *Formatos*

80x80 cm 31"x31"

Technical features / *Características técnicas*

description	LENGTH AND WIDTH	THICKNESS	STRAIGHTNESS OF SIDES	RECTANGULARITY	SURFACE FLATNESS	WATER ABSORPTION	BREAKING STRENGTH (N)	MODULUS OF RUPTURE (N/mm ²)	RESISTANCE TO SURFACE ABRASION OF GLAZED TILES INTENDED FOR USE ON FLOORS	RESISTANCE TO THERMAL SHOCK	CRAZING RESISTANCE	FROST RESISTANCE	CHEMICAL RESISTANCE	RESISTANCE TO STAINING
REQUIRED STANDARDS (ISO 13006)	± 0.3 %	± 5 %	± 0.3 %	± 0.3 %	± 0.4 %	E ≤ 0.5 %	1300 ≤ 5	35sR	REPORT ABRASION CLASS AND CYCLES PASSED	NO CRAZING OBSERVED	NO CRAZING OBSERVED	REQUIRED	GB≤	CLASS 3 ≤
RESULTS	<± 0.3 %	<± 5 %	<± 0.3 %	<± 0.3 %	<± 0.4 %	E ≤ 0.5 %	2400 ≤ 5	45sR	CLASS 3 CYCLES 600	RESISTANT	RESISTANT	RESISTANT	GA	CLASS 4 ≤



description	LENGTH AND WIDTH	THICKNESS	STRAIGHTNESS OF SIDES	RECTANGULARITY	SURFACE FLATNESS	WATER ABSORPTION	BREAKING STRENGTH (N)	MODULUS OF RUPTURE (N/mm ²)	RESISTANCE TO SURFACE ABRASION OF GLAZED TILES INTENDED FOR USE ON FLOORS	RESISTANCE TO THERMAL SHOCK	CRAZING RESISTANCE	FROST RESISTANCE	CHEMICAL RESISTANCE	RESISTANCE TO STAINING	slip-resistance (test method PENDULUM BS 7976)
REQUIRED STANDARDS (ISO 13006)	± 0.3 %	± 5 %	± 0.3 %	± 0.3 %	± 0.4 %	E ≤ 0.5 %	1300 ≤ 5	35sR	REPORT ABRASION CLASS AND CYCLES PASSED	NO CRAZING OBSERVED	NO CRAZING OBSERVED	REQUIRED	GB≤	CLASS 3 ≤	-
RESULTS	<± 0.3 %	<± 5 %	<± 0.3 %	<± 0.3 %	<± 0.4 %	E ≤ 0.5 %	2300 ≤ 5	43sR	CLASS 3 CYCLES 1500	RESISTANT	RESISTANT	RESISTANT	GA	CLASS 4 ≤	Low slip potential (36+)

Packing / *Embalaje*

FORMAT FORMATO	PCS/BOX PIEZAS/CAJA	M2/BOX M2/CAJA	M2/PALLET M2/PALÉ	BOXES/PALLET CAJAS/PALÉ	WEIGHT/PALLET PESO/PALÉ	PALLET (cm) PALÉ (cm)
80x80 cm · 31"x31"	2	1,28	61,44	48	1296	80x120x95





CARRARA

"Living is like tearing through a museum. Not until later do you really start absorbing what you saw, thinking about it, looking it up in a book, and remembering - because you can't take it in all at once"

by Audrey Hepburn

"Vivir es como atravesar un museo. No es hasta más tarde cuando empiezas a absorber lo que viste, a pensar en ello, a buscarlo en un libro y a recordarlo, porque no puedes absorberlo todo de una vez"

PORCELAIN / PORCELÁNICO



Colours / *Colores*




CARRARA



CARRARA


Faces | *Caras*

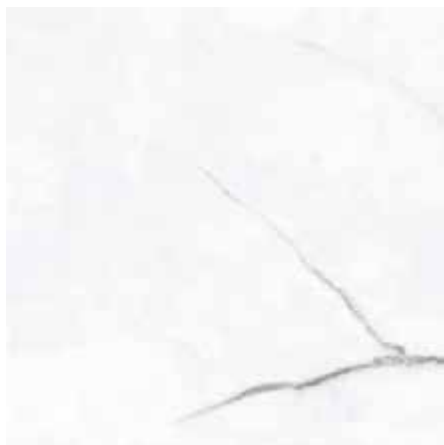

80x80 cm

6 different faces | *6 caras diferentes*



Formats / *Formatos*

80x80 cm 31"x31"



60x60 cm 24"x24"

Technical features / *Características técnicas*

description	LENGTH AND WIDTH	THICKNESS	STRAIGHTNESS OF SIDES	RECTANGULARITY	SURFACE FLATNESS	WATER ABSORPTION	BREAKING STRENGTH (N)	MODULUS OF RUPTURE (N/mm ²)	RESISTANCE TO SURFACE ABRASION OF GLAZED TILES INTENDED FOR USE ON FLOORS	RESISTANCE TO THERMAL SHOCK	CRAZING RESISTANCE	FROST RESISTANCE	CHEMICAL RESISTANCE	RESISTANCE TO STAINING
REQUIRED STANDARDS (ISO 13006)	± 0.3 %	± 5 %	± 0.3 %	± 0.3 %	± 0.4 %	E ≤ 0.5 %	1300 ≤ S	35 ≤ R	REPORT ABRASION CLASS AND CYCLES PASSED	NO CRAZING OBSERVED	NO CRAZING OBSERVED	REQUIRED	GB ≤	CLASS 3 ≤
RESULTS	<± 0.3 %	<± 5 %	<± 0.3 %	<± 0.3 %	<± 0.4 %	E ≤ 0.5 %	2400 ≤ S	45 ≤ R	CLASS 1 CYCLES 150	RESISTANT	RESISTANT	RESISTANT	GA	CLASS 4 ≤



description	LENGTH AND WIDTH	THICKNESS	STRAIGHTNESS OF SIDES	RECTANGULARITY	SURFACE FLATNESS	WATER ABSORPTION	BREAKING STRENGTH (N)	MODULUS OF RUPTURE (N/mm ²)	RESISTANCE TO SURFACE ABRASION OF GLAZED TILES INTENDED FOR USE ON FLOORS	RESISTANCE TO THERMAL SHOCK	CRAZING RESISTANCE	FROST RESISTANCE	CHEMICAL RESISTANCE	RESISTANCE TO STAINING
REQUIRED STANDARDS (ISO 13006)	± 0.3 %	± 5 %	± 0.3 %	± 0.3 %	± 0.4 %	E ≤ 0.5 %	1300 ≤ S	35 ≤ R	REPORT ABRASION CLASS AND CYCLES PASSED	NO CRAZING OBSERVED	NO CRAZING OBSERVED	REQUIRED	GB ≤	CLASS 3 ≤
RESULTS	<± 0.3 %	<± 5 %	<± 0.3 %	<± 0.3 %	<± 0.4 %	E ≤ 0.5 %	2400 ≤ S	45 ≤ R	CLASS 1 CYCLES 150	RESISTANT	RESISTANT	RESISTANT	GB	CLASS 4 ≤

Packing / *Embalaje*

FORMAT FORMATO	PCS/BOX PIEZAS/CAJA	M2/BOX M2/CAJA	M2/PALLET M2/PALÉ	BOXES/PALLET CAJAS/PALÉ	WEIGHT/PALLET PESO/PALÉ	PALLET (cm) PALÉ (cm)
80x80 cm · 31"x31"	2	1,28	61,44	48	1296	80x120x95
60x60 cm · 24"x24"	4	1,44	46,08	32	960	80x120x75





CARRARA *silky matt / mate sedoso* 80x80 cm 31"x31" (floor / suelo)
CANYON BASALT *matt / mate* 60x120 cm 24"x48" (wall / pared)





TOKYO

“Originality consists of returning to the origin. Thus, originality means returning, through one’s resources, to the simplicity of the early solutions”

by Antonio Gaudi

“La originalidad consiste en el retorno al origen: así pues, original es aquello que vuelve a la simplicidad de las primeras soluciones”



Colours / *Colores*



TOKYO BEIGE



TOKYO TAUPE



TOKYO SILVER



TOKYO GRAY



Faces | *Caras*




TOKYO SILVER

4 different faces in all colours | *4 caras diferentes en todos los colores*






Formats / *Formatos*



80x80 cm 31"x31"



60x60 cm 24"x24"

Technical features / *Características técnicas*

description	LENGTH AND WIDTH	THICKNESS	STRAIGHTNESS OF SIDES	RECTANGULARITY	SURFACE FLATNESS	WATER ABSORPTION	BREAKING STRENGTH (N)	MODUL US OF RUPTURE (N/mm²)	RESISTANCE TO SURFACE ABRASION OF GLAZED TILES INTENDED FOR USE ON FLOORS	RESISTANCE TO THERMAL SHOCK	CRAZING RESISTANCE	FROST RESISTANCE	CHEMICAL RESISTANCE	RESISTANCE TO STAINING
REQUIRED STANDARDS (ISO 13006)	± 0.3 %	± 5 %	± 0.3 %	± 0.3 %	± 0.4 %	E ≤ 0.5 %	1300 ≤ S	35≤R	REPORT ABRASION CLASS AND CYCLES PASSED	NO CRAZING OBSERVED	NO CRAZING OBSERVED	REQUIRED	GB≤	CLASS 3 ≤
RESULTS	<± 0.3 %	<± 5 %	<± 0.3 %	<± 0.3 %	<± 0.4 %	E ≤ 0.5 %	2400 ≤ S	45≤R	CLASS 1 CYCLES 150	RESISTANT	RESISTANT	RESISTANT	GA	CLASS 4 ≤

Packing / *Embalaje*

FORMAT FORMATO	PCS/BOX PIEZAS/CAJA	M2/BOX M2/CAJA	M2/PALLET M2/PALÉ	BOXES/PALLET CAJAS/PALÉ	WEIGHT/PALLET PESO/PALÉ	PALLET (cm) PALÉ (cm)
80x80 cm · 31"x31"	2	1,28	61,44	48	1296	80x120x95
60x60 cm · 24"x24"	4	1,44	46,08	32	960	80x120x75





PIETRA

“The man who moves a mountain begins
by choosing small rocks”

by Confucio

*“El hombre que mueve montañas empieza
moviendo pequeñas rocas”*

Colours / *Colores*



PIETRA GRAY



PIETRA TAUPE



PIETRA MARENGO



PIETRA SAND

PIETRA

Faces | *Caras*




PIETRA GRAY


9 different faces in all colours | *9 caras diferentes en todos los colores*



Formats / *Formatos*



80x80 cm 31"x31"



60x60 cm 24"x24"



39x78 cm 15"x31"



Technical features / *Características técnicas*



description	LENGTH AND WIDTH	THICKNESS	STRAIGHTNESS OF SIDES	RECTANGULARITY	SURFACE FLATNESS	WATER ABSORPTION	BREAKING STRENGTH (N)	MODULUS OF RUPTURE(N/mm ²)	RESISTANCE TO SURFACE ABRASION OF GLAZED TILES INTENDED FOR USE ON FLOORS	RESISTANCE TO THERMAL SHOCK	CRAZING RESISTANCE	FROST RESISTANCE	CHEMICAL RESISTANCE	RESISTANCE TO STAINING
REQUIRED STANDARDS (ISO 13006)	± 0.3%	± 5 %	± 0.3 %	± 0.3 %	± 0.4%	E ≤ 0.5 %	1300 ≤ S	35≤R	REPORT ABRASION CLASS AND CYCLES PASSED	NO CRAZING OBSERVED	NO CRAZING OBSERVED	REQUIRED	GB≤	CLASS 3 ≤
RESULTS	≤± 0.3%	≤± 5 %	≤± 0.3 %	≤± 0.3 %	≤± 0.4%	E ≤ 0.5 %	3000 ≤ S	45≤R	CLASS 4 CYCLES 2100&6000	RESISTANT	RESISTANT	RESISTANT	GA	CLASS 3 ≤

Packing / *Embalaje*

FORMAT FORMATO	PCS/BOX PIEZAS/CAJA	M2/BOX M2/CAJA	M2/PALLET M2/PALÉ	BOXES/PALLET CAJAS/PALÉ	WEIGHT/PALLET PESO/PALÉ	PALLET (cm) PALÉ (cm)
80x80 cm · 31"x31" (20mm)	1	0.64	30.72	48	1344	120x80x95
60x60 cm · 24"x24" (20 mm)	2	0.72	23.04	32	1074	125x71x75
39x78 cm · 15"x31" (20mm)	2	0.61	16.42	27	730	125x85x52





PIETRA TAUPE *anti-slip / antideslizante*
80x80 cm 31"x31" (left / izquierda)
PIETRA SAND *anti-slip / antideslizante*
39x78 cm 15,4"x30,7" (right / derecha)



PIETRA MARENGO anti-slip / antideslizante 80x80 cm 31"x31"



PIETRA GRAY anti-slip / antideslizante 80x80 cm 31"x31"



PIETRA



PIETRA GRAY *anti-slip / antideslizante* 80x80 cm 31"x31"



20 mm

PIETRA





OCEAN

“Empty your mind, be formless. Shapeless, like water. If you put water into a cup, it becomes the cup. You put water into a bottle and it becomes the bottle. You put it in a teapot it becomes the teapot. Now, water can flow or it can crash. Be water my friend”

by Bruce Lee

“Vacía tu mente. Sé amorfo, sin límites, como el agua. Si pones agua en un vaso, ella se transforma en vaso; si la pones en una botella, se transforma en botella; si la colocas en una taza, se transforma en taza. El agua puede fluir o también destruir”

PORCELAIN / PORCELÁNICO

 6 mm

Colours / *Colores*



OCEAN MOSAIC




OCEAN HEX



OCEAN WAVES



OCEAN GAUDÍ

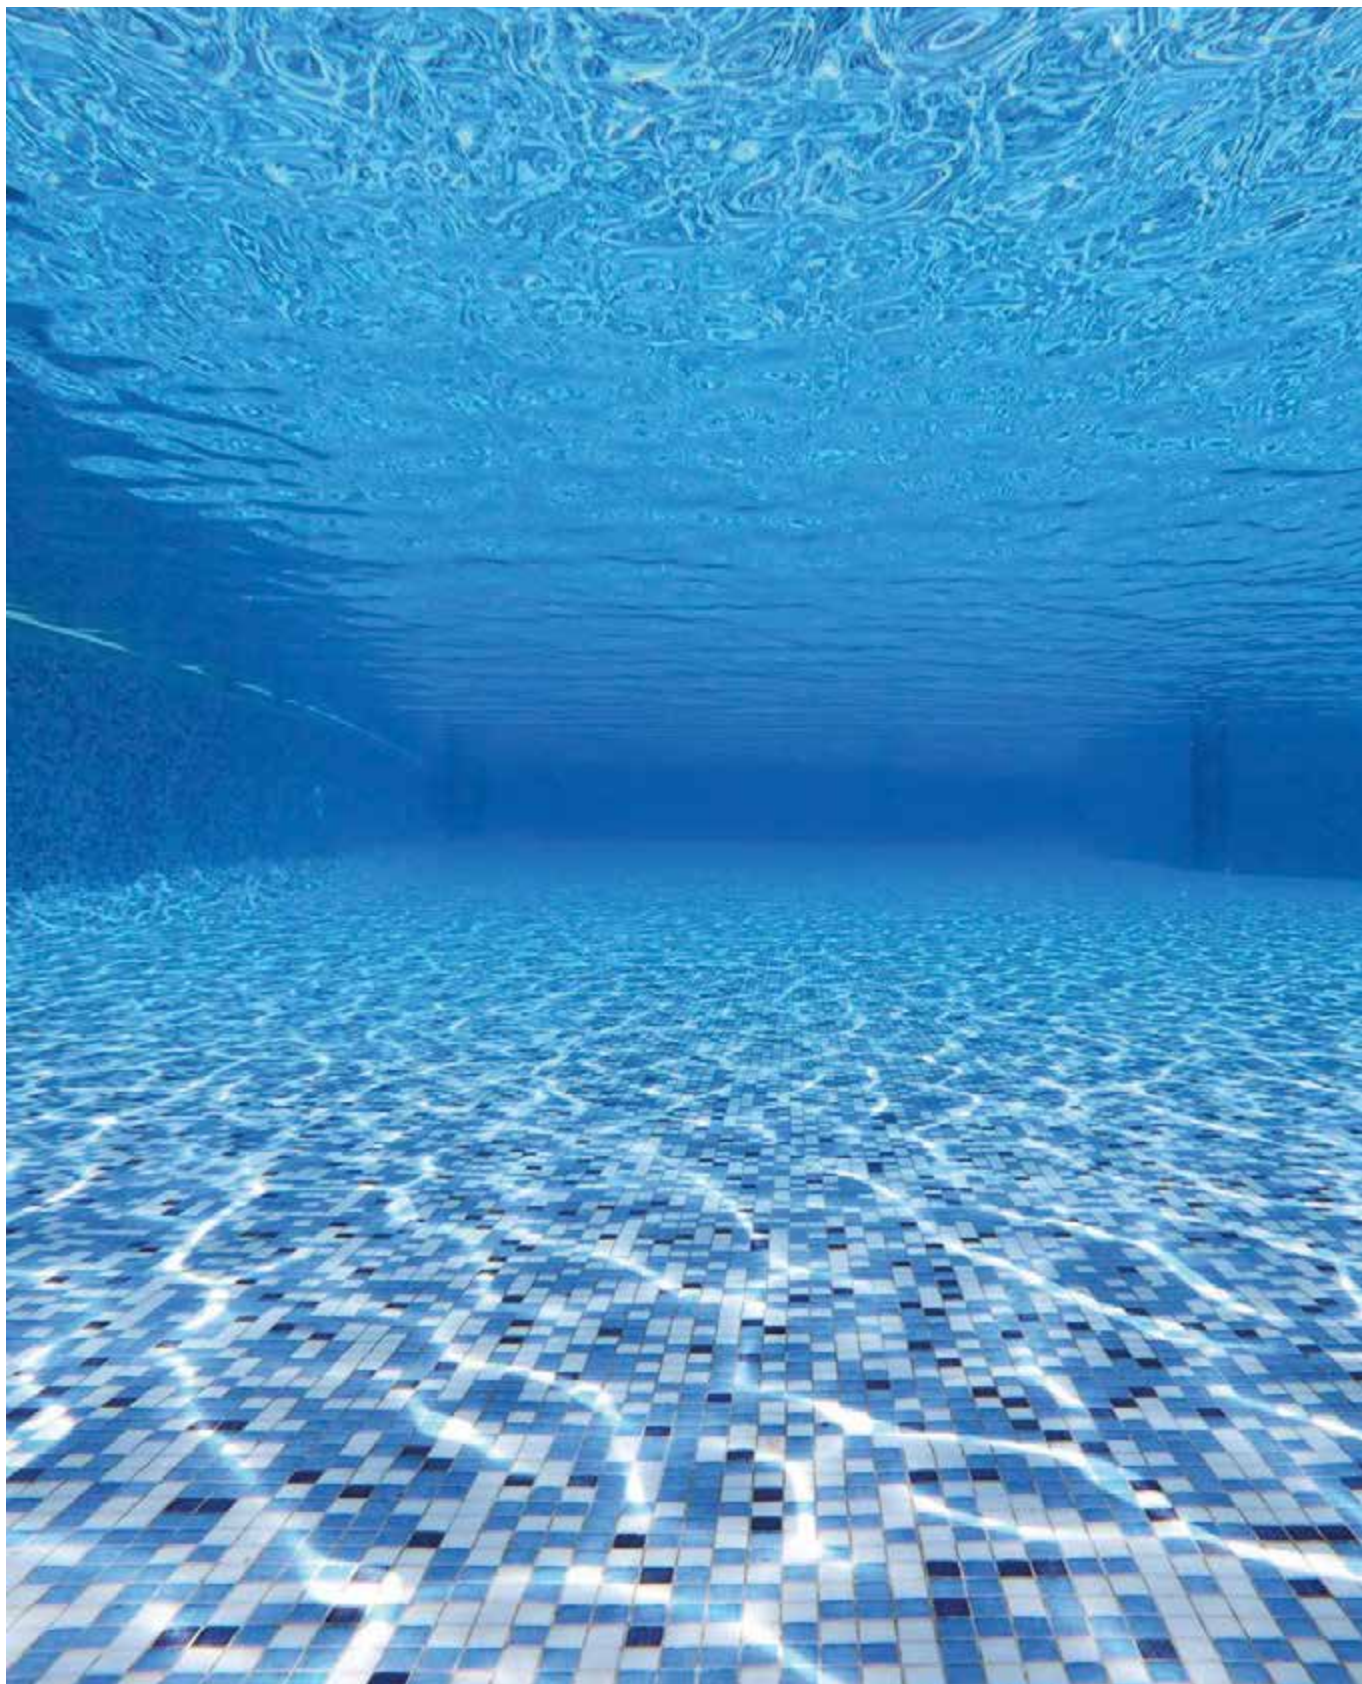


OCEAN MOSAIC *glossy / brillo* 29x29 cm 11,8"x11,8" (pool / piscina)





Formats / Formatos



29x29 cm 11,8"x11,8"

Technical features / Características técnicas

description	LENGTH AND WIDTH	THICKNESS	STRAIGHTNESS OF SIDES	RECTANGULARITY	SURFACE FLATNESS	WATER ABSORPTION	BREAKING STRENGTH (N)	MODULUS OF RUPTURE (N/mm ²)	RESISTANCE TO SURFACE ABRASION OF GLAZED TILES INTENDED FOR USE ON FLOORS	RESISTANCE TO THERMAL SHOCK	CRAZING RESISTANCE	FROST RESISTANCE	CHEMICAL RESISTANCE	RESISTANCE TO STAINING
REQUIRED STANDARDS (ISO 13006)	± 0.6 %	± 5 %	± 0.5 %	± 0.5 %	± 0.5 %	E ≤ 0.5 %	700 ±5	35±R	REPORT ABRASION CLASS AND CYCLES PASSED	NO CRAZING OBSERVED	NO CRAZING OBSERVED	REQUIRED	GB±	CLASS 3 ±
RESULTS	±0.4 %	±1.5 %	±0.5 %	±0.5 %	±0.5 %	E ≤ 0.5 %	850 ±5	45±R	CLASS 3 CYCLES 600	RESISTANT	RESISTANT	RESISTANT	GA	CLASS 4 ±

Packing / Embalaje

FORMAT FORMATO	PCS/BOX PIEZAS/CAJA	PCS/M2 PIEZAS/M2	M2/BOX M2/CAJA	WEIGHT/BOX PESO/CAJA	M2/PALLET M2/PALÉ	BOXES/PALLET CAJAS/PALÉ	WEIGHT/PALLET PESO/PALÉ	PALLET (cm) PALÉ (cm)
29x29 cm · 11,8"x11,8"	19	~12	1.5979	19.9	115.0488	72	1911	80x120x102





www.worldstile.com

“Every day we know more and understand less.”

By Albert Einstein



WORLD'S TILE

PALM LAND, S.L.
Camí La Rambla, 16.
12200 ONDA (Castellón)
ESPAÑA
info@worldstile.com
+34 964 626 691
www.worldstile.com